


## 4900 Sliding HI System Thermally Broken

Sliding window and door system with straight aesthetic which has a slim interlock of just 35 mm.

It allows to have glass thicknesses of up to 36 mm, increasing the thermal and acoustic performance.

Its sashes of up to 240 kg can reach the dimensions of 2200 (W) x 2600 (H) mm.

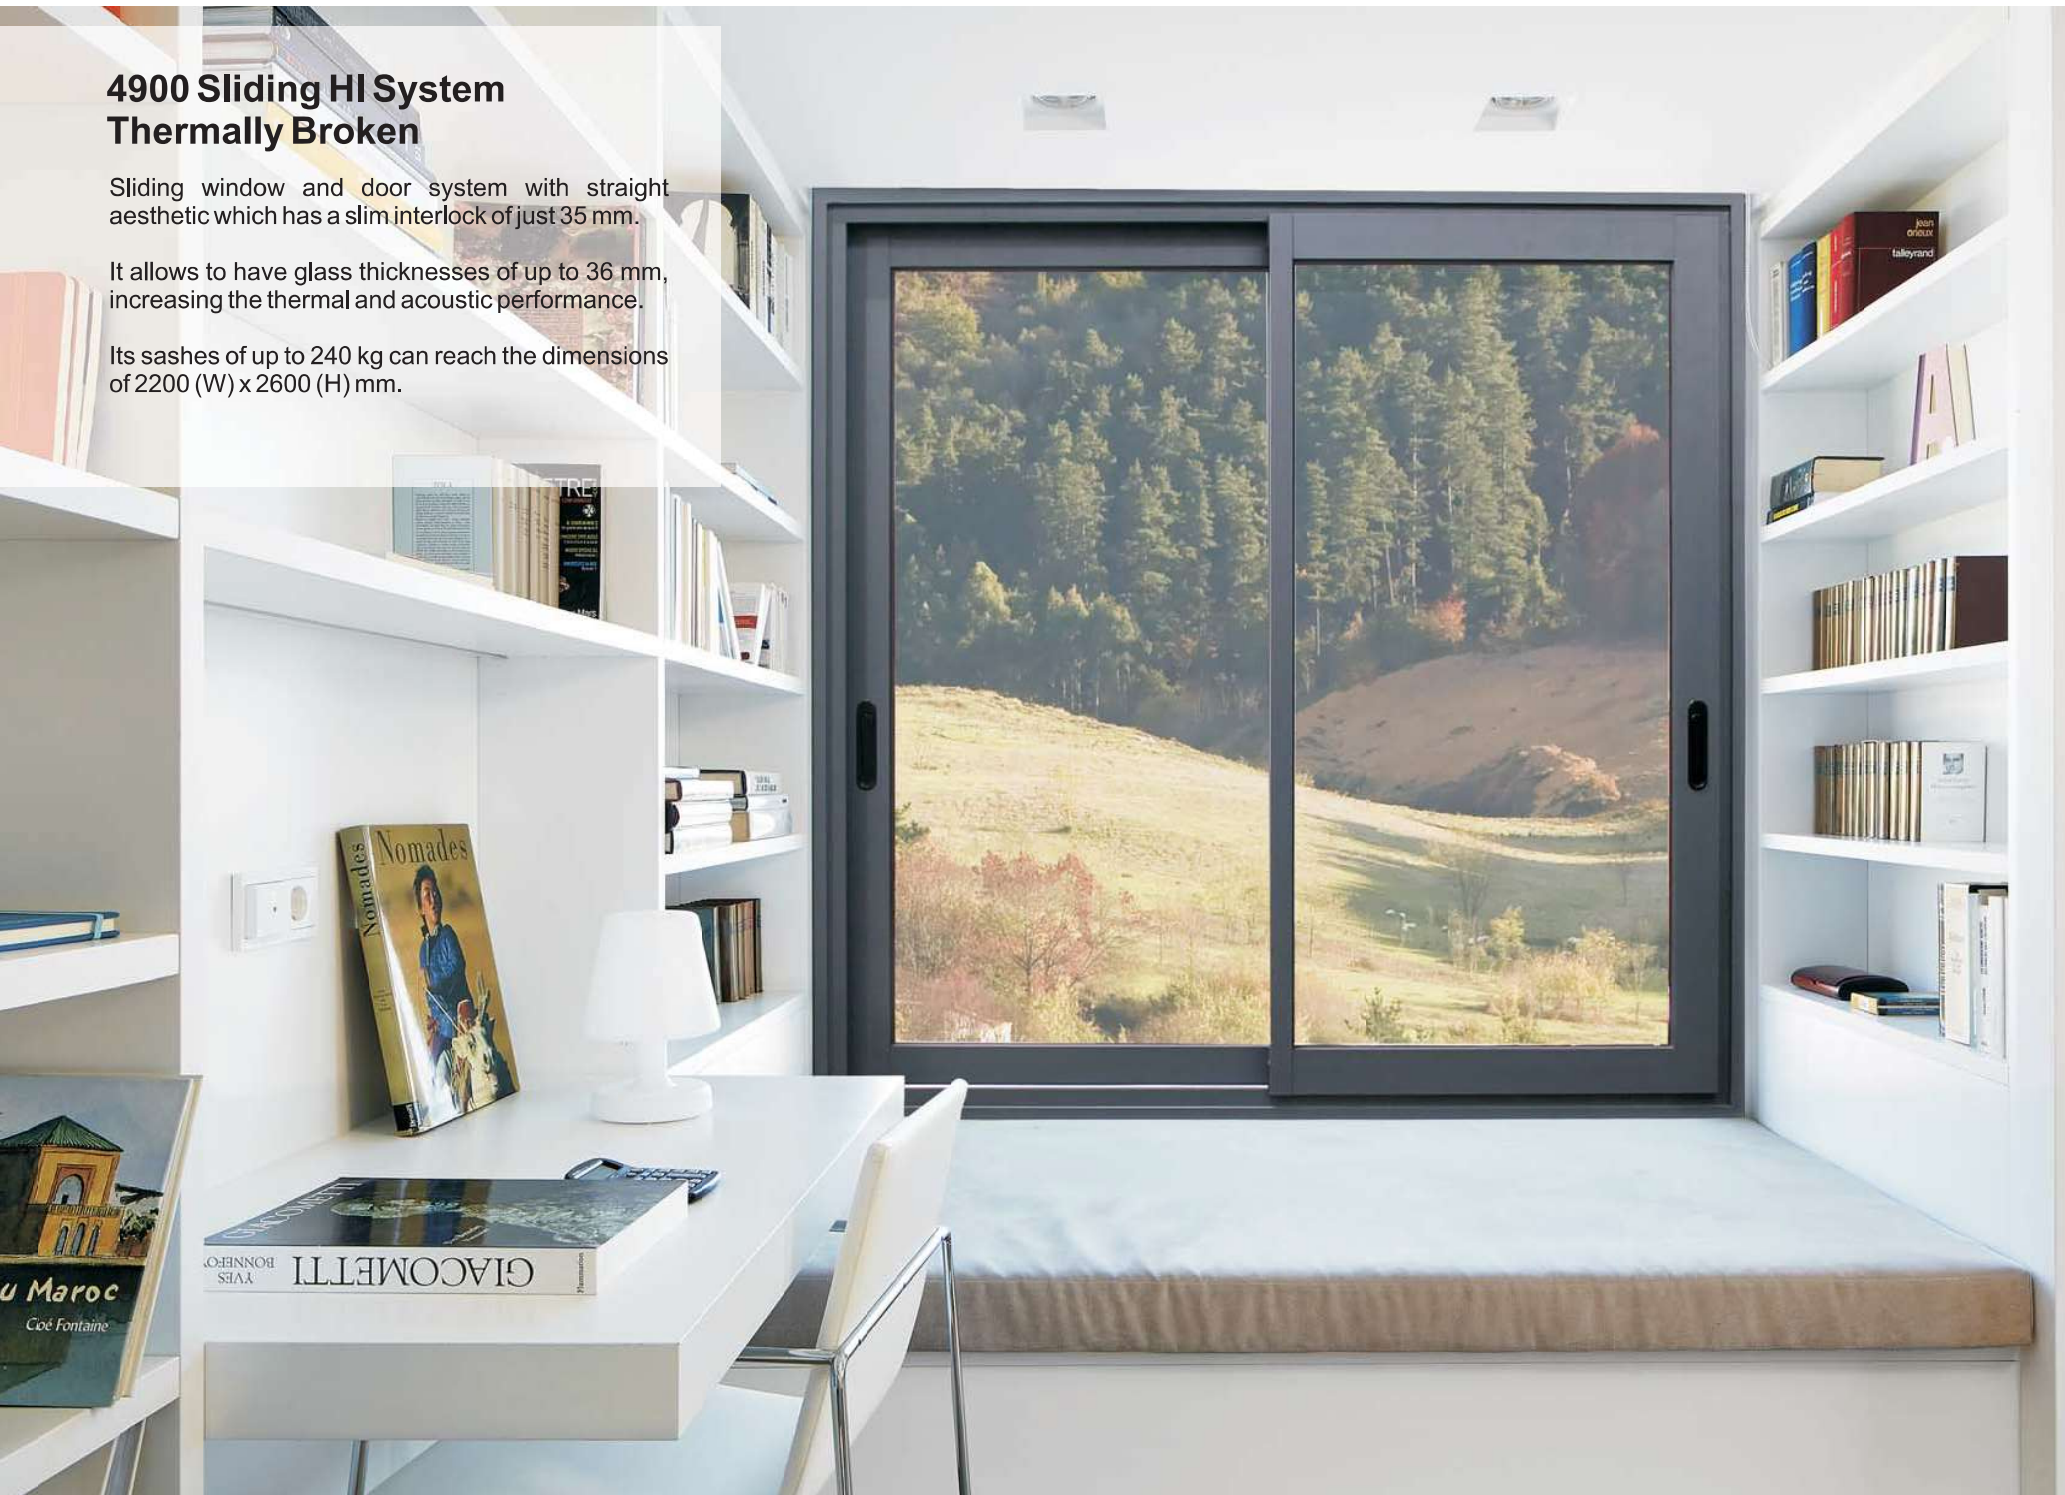

# 4900 Sliding HI System Thermally Broken

## Transmittance

Uw from 1,2 (W/m²K)

Please consult typology, dimensions and glass

## Acoustic insulation

Maximum glazing: 36 mm

Maximum acoustic insulation **Rw = 40 dBA**

## Categories achieved at test centre

Air permeability  
(EN 12207): Class 4

Water tightness  
(EN 12208): Class 7A

Wind resistance  
(EN 12210): Class C5  
Reference test window 1.23 x 2.48 m, 2 sashes.

## Finishes

Possibility of dual colour  
Colour powder coating (RAL, mottled and rough)  
Wood effect powder coating  
Anti-bacterial powder coating  
Anodized




## Sections

Frame 70 mm  
126 mm 3 rails  
Sash 48 mm


## Profile thickness

Window 1,6 mm

Polyamide strip length 34 mm

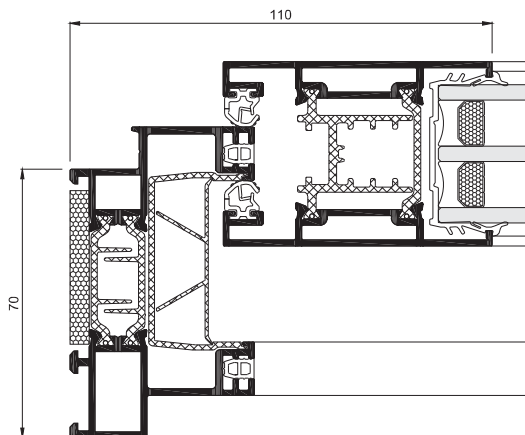

## Opening possibilities

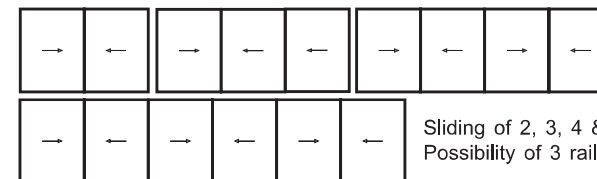

Sliding of 2, 3, 4 & 6 sashes  
Possibility of 3 rails

## Maximum dimensions/sash

Lift version  
Width (L) = 2200 mm  
Height (H) = 2600 mm

Consult maximum weight and dimensions according to typologies

## Maximum weight/sash

240 Kg